

KYALAMI

PHOTOMETRY

AYRTON
Digital Lighting



Total Flux	2,440 lm

CCT @ light source engine	9700 (±900K)
CCT @ open	9000 (±900K)
Ra @ open	70 (±2)
TLCI	45
TM-30	Rf: 68 Rg: 87

Fan Mode	**Noise Level (dBA)**	**by Goniometer (lm)**
Auto	40,2	2,440
Stage	45,3	2,440
Silence	35,5	1,890
Super Silence	31,6	1,310

Note: noise messured @1m distance, static status, ambient 31 dBA.

Voltage / Power	100-240 V, 50-60 Hz	200 W
Fixture Dimension / Weight	265 x 430 x 265 mm	14.5 kg
Packing Dimension / Weight	320 x 460 x 320 mm	21 kg

AUTO MODE | NATIVE CRI GREATER THAN 70

MIN ZOOM

BEAM OPENING

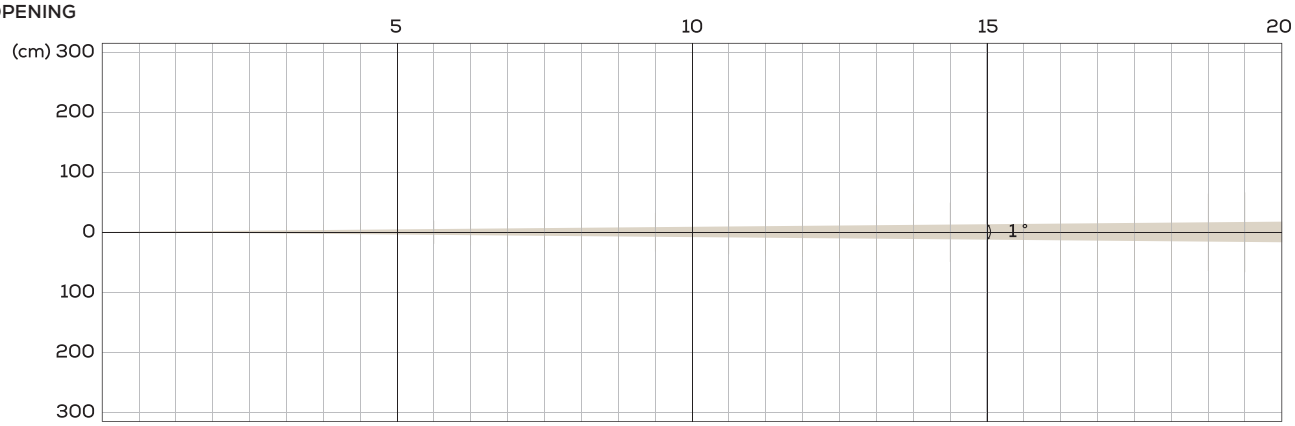

INTENSITY

Distance (m)	5		10		15		20		30		50		100	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
White	1,648,000	0.09	412,000	0.17	184,000	0.26	103,000	0.35	45,780	0.52	16,480	0.87	4,120	1.75

Distance (m)	100		250		500		750		1000		1500		2000	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
White	4,120	1.75	659	4.36	165	8.73	73	13.09	41	17.45	18	26.18	10	34.91

AYRTON

Digital Lighting